


STORMDRAIN TM

Typical Construction Details

SD 400

Free movement joint to engineers detail both sides of channel

900

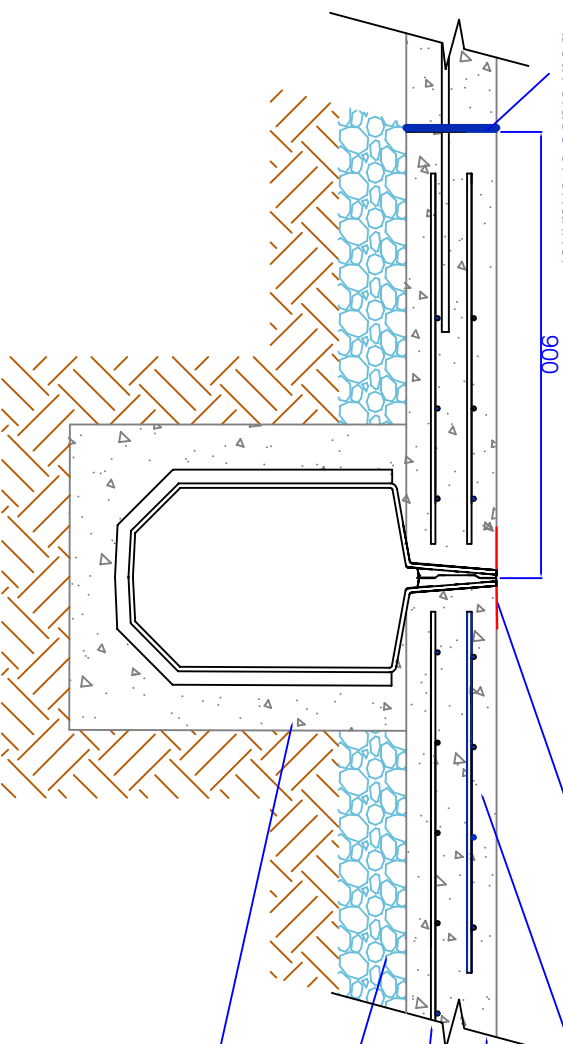

Surface finish to be above channel, see separate detail.

800mm wide strip of A252 Reinforcement Fabric with 50mm cover from inlet unit to Engineers specification

200mm Concrete Slab Thickness

A252 Reinforcement Fabric with 50mm cover from Stormdrain inlet unit to structural engineers specifications

Hardcore Base

Minimum 200mm Concrete bed & surround, (minimum grade C35)

BCM GRC Ltd.

Drawing not to scale

Unit 22 Civic Industrial Park, Whitchurch, Shropshire SY13 1TT

t:01948 665321 f:01948 666381 e:bcmgrc@aol.com w:bcmgrc.com